

NEW

WATER PLASTI COATING

NO.21

MADE
IN
JAPAN

水溶性 防錆・保護塗料

Features: 特徴

- ✓ *Water Base* 水溶性
- ✓ *Non-Flammable Liquid* 非引火性
- ✓ *Rust Prevention* 防錆
- ✓ *Water Proofing* 防水
- ✓ *Surface Protection* 表面保護
- ✓ *Label Coating* ラベルコーティング
- ✓ *Insulation* 絶縁
- ✓ *Normal Transportation* 一般輸送

Object Material 対象物

- Metal Steel 鉄類
- Plastic プラスチック類
- Glass ガラス類
- Ceramic 陶器類

How to use 使用方法

- Paint with a brush
ブラシにて対象物に塗布
- Stiffen in 30 minutes
30分にて硬化します
- Drying complete in 24 hours
24時間後、完全に乾燥
- Wipe it out with water and cloth before drying
乾燥前は水と布にて拭き取ります
- Wipe it out with thinner and cloth after drying
乾燥後はシンナーと布にて拭き取ります


Chemical Properties 化学的性質

- Appearance 外観: Milk-white viscosity liquid 乳白色、粘性液体
- Transparency after drying 乾燥後は透明
- Solubility (water) 溶解度: a fusibility 可溶
- Smell 臭い: Slightly 少し
- Ph: 7-9
- Boiling Point 沸点: about 100
- Flash point 引火点: None なし
- Specific Gravity 比重: 1.1 (23)
- Vapor Pressure 蒸気性: 2337 Pa (20)
- Steam Density 蒸気密度: 0.017 kg/m³

Precautions 注意事項

- To avoid freeze , direct rays of the sun: 凍結、直射日光を避ける
- Keep it with cap at indoors (5 - 40): 5-40 以下の屋内に密栓して保管

Distributor

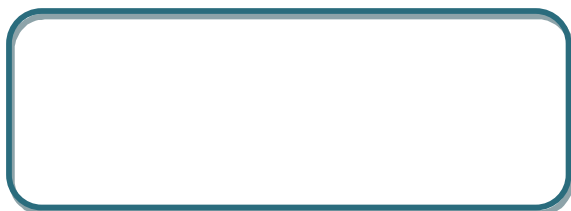


4 kgs Bottle

1 kg Bottle



Painting Brush



Painting on Plastic



Painting on Steel



Painting on Snap gauge




Caliper



Plug gauge



Dial Indicator

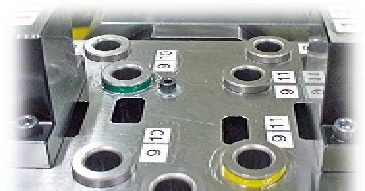

Jigs, Equipments, Machines & Tools

Manufactured by DAIKYO CHEMICAL CO.,LTD
Distributed by SPG INC.(sales@spg-network.com)